


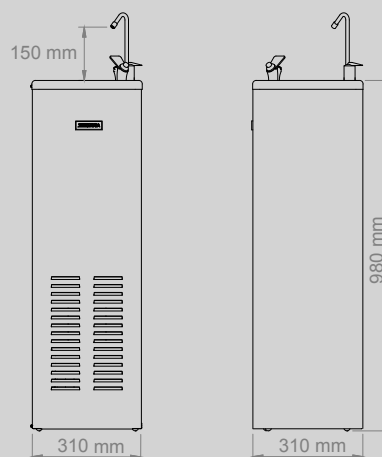

Refresh P 240 / 260 | Hardworking, top of the class

Specifications	RFP240	RFP260
Cabinet	Skinplate gray Stainless steel (optional)	Skinplate gray Stainless steel (optional)
Dispensing	Cold	Cold
Number of spouts	2	2
Simultaneous dispensing	Yes	Yes
Energy-saving design	Yes	Yes
Cooling capacity	120 L/h	55 L/h
Continuous	Continuous cold water flow with dispensing <1.5 L/min	
Cold water temperature	3 / 12 (°C)	3 / 12 (°C)
Adjustable temperature	Yes	Yes
Condensation method	Forced ventilation	Forced ventilation
Cooling technology	High Performance Direct Chill	Silver Turbo Clean
Noise level	<57 dB	<52 dB
Inlet water pipe	1/4" thread	Fast fitting 8 mm
Waste water pipe connection	Pipe ID 18.7 mm	Pipe ID 18.7 mm
Mains water pressure	1-5 bar	1-5 bar
Power	230 V / 50 Hz	230 V / 50 Hz
Power consumption	1.4 A / 200 W	1.3 A / 175 W
Compressor power	1/6 Hp (HBP)	1/6 Hp
Energy Class	A+	A+++
Refrigerant gas	R134a	R134 / R600a
Unit weight / Shipping weight	24 / 26 (kg)	24 / 26 (kg)
Dimensions (H x W x D)	98 x 31 x 31	98 x 31 x 31
Packaging dimensions (H x W x D)	110 x 37,5 x 33	110 x 37,5 x 33
Units per pallet	6	6

07/07/2020

All specifications are subjected to change without notice